




Hexalobular socket countersunk head tapping screws

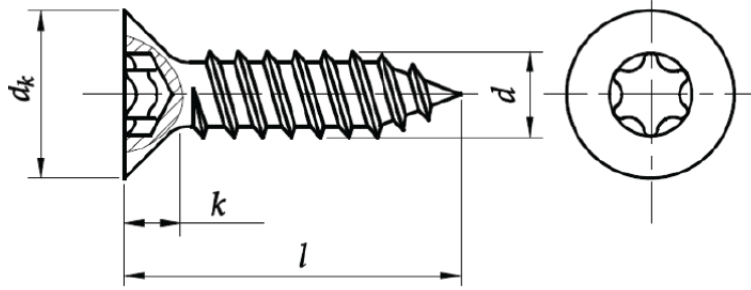

STANDARD	MATERIAL	CLASS	COATING
ISO 14586 C	steel		zinc plated

d	ST2,9	ST3,5	ST4,2	ST4,8	ST5,5	ST6,3	
P	1,1	1,3	1,4	1,6	1,8	1,8	
dk	max	5,5	7,3	8,4	9,3	10,3	11,3
	min	5,2	6,9	8	8,9	9,9	10,9
k _{max}	1,7	2,35	2,6	2,8	3	3,15	
T	10	15	20	25	25	30	

T – Torx hexalobular socket

P – thread pitch