




Self-drilling screws with wafer head

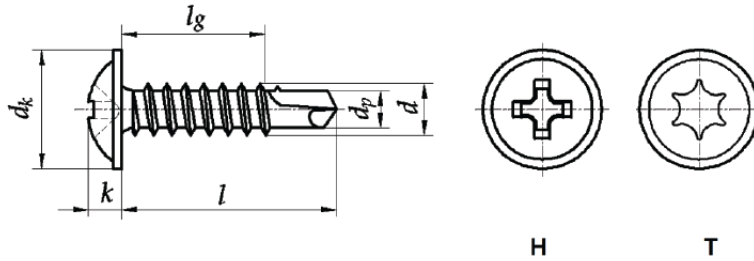

STANDARD	MATERIAL	CLASS	COATING
~ DIN 7504 T			

d_1		4,2
d_k	max	11,2
	min	10,2
k	≈	3,0
d_p	≈	3,5
Drilling capacity	from	1,75
	up to	3,0
H		2
T		20

l	l_g
13	4,3
16	7,3
19	10,3
25	16,3
32	23

H – cross recess Phillips
 T – hexalobular socket Torx