




Thread rolling hexagon socket head cap screws

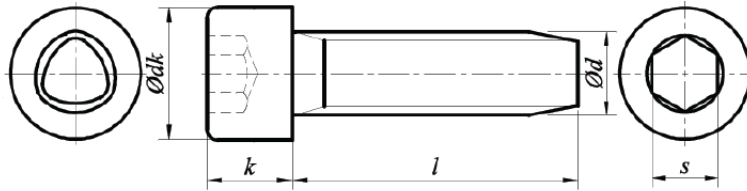

| STANDARD | MATERIAL | CLASS | COATING |
|-------------|----------|-------|---------|
| DIN 7500 EE | | | |

| d | | M5 | M6 | M8 |
|----------------|--------|-------|-------|-------|
| P | | 0,8 | 1 | 1,25 |
| d _k | max 1) | 8,5 | 10 | 13 |
| | max 2) | 8,72 | 10,22 | 13,27 |
| | min | 8,28 | 9,78 | 12,73 |
| k | max | 5 | 6 | 8 |
| | min | 4,82 | 5,7 | 7,64 |
| Torx (Tx)* | nom | 4 | 5 | 6 |
| | min | 4,02 | 5,02 | 6,02 |
| | max | 4,095 | 5,14 | 6,14 |