



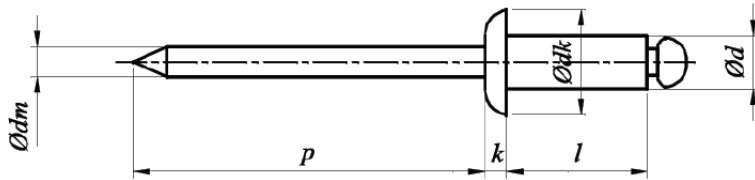

Nity zrywalne z łbem płaskim Al/Al

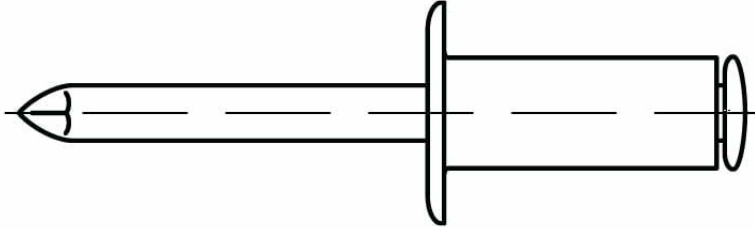

| NORMA | MATERIAŁ | KLASA | POWŁOKA |
|-----------|----------|-------|---------|
| ISO 15981 | Al/Al | | |

| d_{nom} | | 2,4 | 3,2 | 4,0 | 4,8 | 6,4 |
|-----------------------|------------|---------------------------------|-----------|-------------|-----------|---------|
| d | <i>max</i> | 2,48 | 3,28 | 4,08 | 4,88 | 6,48 |
| | <i>min</i> | 2,25 | 3,05 | 3,85 | 4,65 | 6,25 |
| d_k | <i>max</i> | 5,0 | 6,7 | 8,4 | 10,1 | 13,4 |
| | <i>min</i> | 4,2 | 5,8 | 6,9 | 8,3 | 11,6 |
| k_{max} | | 1 | 1,3 | 1,7 | 2 | 2,7 |
| $d_{m max}$ | | 1,6 | 2,1 | 2,55 | 3,05 | 4 |
| p_{min} | | 25 | 25 | 25 | 27 | 27 |
| <i>Długość nitu l</i> | | <i>Zalecane zakresy tężenia</i> | | | | |
| <i>nom.=min</i> | <i>max</i> | | | | | |
| 5 | 6 | – | 0,5 – 1,5 | – | – | – |
| 6 | 7 | 0,5 – 3 | 1,5 – 3,5 | 1 – 3 | 1,5 – 2,5 | – |
| 8 | 9 | – | 3,5 – 5 | 3 – 5 | 2,5 – 4 | – |
| 9 | 10 | 3 – 6 | – | – | – | – |
| 10 | 11 | – | 5 – 7 | 5 – 6,5 | 4 – 6 | – |
| 12 | 13 | 6 – 9 | 7 – 9 | 6,5 – 8,5 | 6 – 8 | 3 – 6 |
| 14* | | – | – | 8,5 – 10,5 | 7,5 – 9 | – |
| 16 | 17 | – | 9 – 13 | 8,5 – 12,5 | 8 – 12 | 6 – 10 |
| 20 | 21 | – | 13 – 17 | 12,5 – 16,5 | 12 – 15 | 10 – 14 |
| 21* | | – | – | – | 13 – 16 | – |
| 24* | | – | – | – | 14 – 19 | – |
| 25 | 26 | – | 17 – 22 | 16,5 – 21 | 15 – 20 | 14 – 18 |
| 30 | 31 | – | – | – | 20 – 25 | 18 – 23 |