



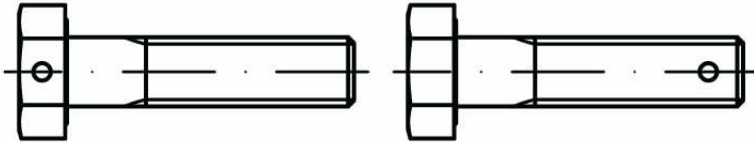

Śruba z łbem sześciokątnym z otworem pod zawleczkę
w trzpieniu DIN 962 B, PN 82070, ISO 7378

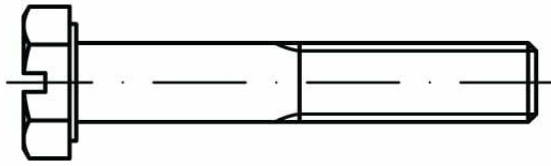

NORMA	MATERIAŁ	KLASA	POWŁOKA
DIN 962 B PN 82070 ISO 7378			

d	M4	M5	M6	M7	M8	M10	M12	M14
b (l = do 125)	14	16	18	20	22	26	30	34
b (l = do 200)	–	22	24	26	28	32	36	40
b (l = od 200)	–	–	–	–	–	45	49	53
k	2,8	3,5	4	4,8	5,3	6,4	7,5	8,8
c _{max}	0,4	0,5	0,5	0,5	0,6	0,6	0,6	0,6
d ₁ (H14)	1	1,2	1,6	1,6	2	2,5	3,2	3,2
l – f	1,9	2,2	2,8	2,8	3,3	4,2	5	5,5
e	7,66	8,79	11,05	12,12	14,34	18,9	21,1	24,49
s	7	8	10	11	13	17(16)	19(18)	22(21)

d	M16	M18	M20	M22	M24	M27	M30	M33
b (l = do 125)	38	42	46	50	54	60	66	72
b (l = do 200)	44	48	52	56	60	66	72	78
b (l = od 200)	57	61	65	69	73	79	85	91
k	10	11,5	12,5	14	15	17	18,7	21
c _{max}	0,8	0,8	0,8	0,8	0,8	0,8	0,8	0,8
d ₁ (H14)	4	4	4	5	5	5	6,3	6,3
l – f	6	6,5	6,5	7,5	8,5	8,5	9,5	9,5
e	26,75	30,14	33,53	35,72	39,98	45,2	50,85	55,37
s	24	27	30	32(34)	36	41	46	50

d	M36	M39	M42	M45	M48	M52		
b (l = do 125)	78	84	90	96	102	–		
b (l = do 200)	84	90	96	102	108	116		
b (l = od 200)	97	103	109	115	121	129		
k	22,5	25	26	28	30	33		
c _{max}	0,8	1	1	1	1	1		
d ₁ (H14)	6,3	6,3	8	8	8	8		
l – f	10,5	10,5	13	13	14	14		
e	60,79	66,44	71,3	76,95	82,6	88,25		
s	55	60	65	70	75	80		