



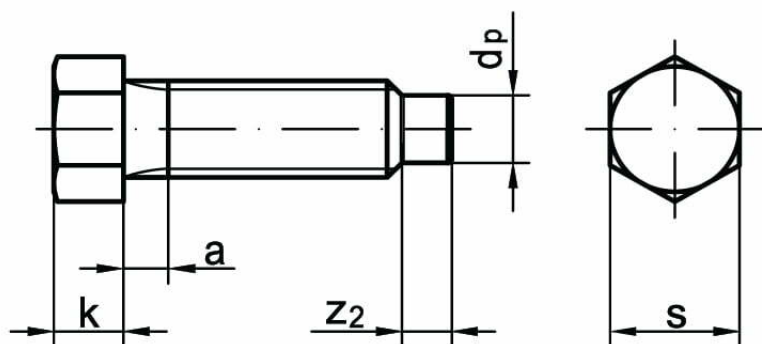

Śruby dociskowe z łbem sześciokątnym z czopem walcowym
DIN 561 B, PN 82303

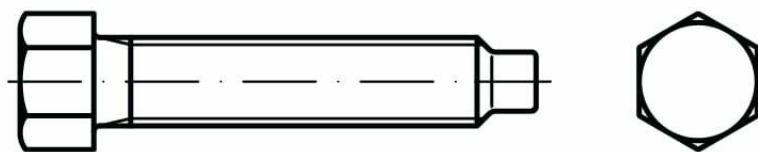

NORMA	MATERIAŁ	KLASA	POWŁOKA
DIN 561 B PN 82303	A2 A4	14H 22H	cynk galwaniczny

d		M6	M8	M10	M12		M16		M20	M24	M30	M36
		–	–	–	–		–		M20x2	M24x2	M30x2	M36x3
P		1	1,25	1,5	1,75		2		2,5	3	3,5	4
d _p	nom.	4	5,5	7	8,5		12		15	18	23	28
	max.	3,86	5,36	6,85	8,35		11,85		14,85	17,85	22,84	27,84
	min.	3,68	5,18	6,63	8,13		11,58		14,58	17,58	22,51	27,51
Z ₂	nom=min.	3	4	5	6		8		10	12	15	18
	max.	3,25	4,3	5,3	6,3		8,36		10,36	12,43	15,43	18,43
k _{nom}		5	6	7	9		11		14	17	21	25
s		8	10	13	16	17	18	19	24	30	36	46
a _{1 max}		3	4	4,5	5,3		6		7,5	9	10,5	12