

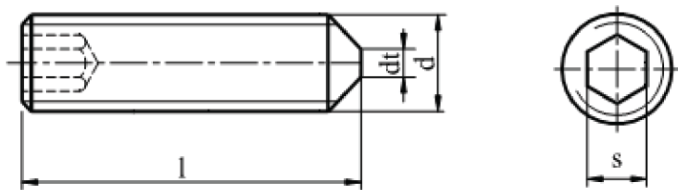


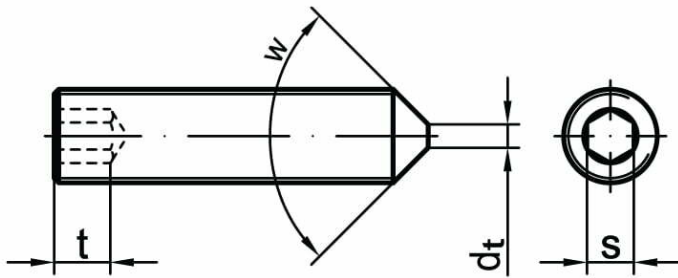

Wkręt dociskowy z końcem stożkowym DIN 914, PN 82315, ISO 4027

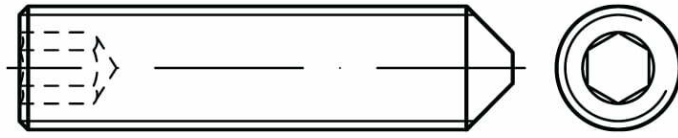

| NORMA | MATERIAŁ | KLASA | POWŁOKA |
|---|-----------------|-------|------------------|
| DIN 914 PN 82315 ISO 4027- z gwintem metrycznym – z gwintem metrycznym drobnozwojnym | 45H A2 A4 | | cynk galwaniczny |

| d | M1,6 | M2 | M2,5 | M3 | M4 | M5 |
|------------|------|-----|------|------|------|------|
| d_{tmax} | 0,4 | 0,5 | 0,65 | 0,75 | 1,00 | 1,25 |
| s | 0,7 | 0,9 | 1,3 | 1,5 | 2,0 | 2,5 |

| d | M6 | M8 | M10 | M12 | M16 | M20 |
|------------|-----|----|-----|-----|-----|-----|
| d_{tmax} | 1,5 | 2 | 2,5 | 3 | 4 | 5 |
| s | 3 | 4 | 5 | 6 | 8 | 10 |