




# Wkręty do drewna z łbem sześciokątnym DIN 571, PN 82501

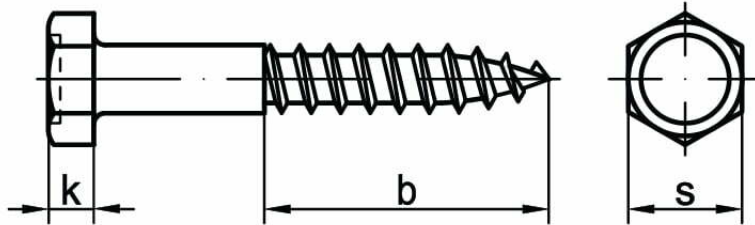

NORMA	MATERIAŁ	KLASA	POWŁOKA
DIN 571 PN 82501	stal A2 A4 mosiądz		cynk galwaniczny cynk ogniowy cynk termodyfuzyjny powłoki lamelowe

d	4	5	6	(7)	8	10	12	16	20	
$d_s$	<i>max</i>	4	5	6	7	8	10	12	16	20
	<i>min</i>	3,52	4,52	5,52	6,42	7,42	9,42	11,3	15,3	19,3
$k$	<i>nom.</i>	2,8	3,5	4	5	5,5	7	8	10	13
	<i>max</i>	3,1	3,88	4,38	5,38	5,88	7,45	8,45	10,45	13,90
	<i>min</i>	2,5	3,13	3,63	4,63	5,13	6,55	7,55	9,55	12,1
$s$	<i>nom.</i>	7	8	10	12	13	17	19	24	30
	<i>max</i>	7	8	10	12	13	17	19	24	30
	<i>min</i>	6,64	7,64	9,64	11,57	12,57	16,57	18,48	23,16	29,16